

PSC 250T BS FLOOR

Unique modern thermal insulation material.

SAVES
up to 30 percent
**ON ENERGY
BILLS**

**AGAINST
CREEP!**



- ✓ Thermally insulating, anti-mould, cancels thermal bridges. The floor does not freeze.
- ✓ Prevents condensation. Reflects heat back.
- ✓ Very suitable for under floor heating! For all types of floors.
- ✓ Replaces up to 12 cm of conventional insulation - the layer is only 1 mm! Does not reduce the height of the room.



Březník 218, CZ - 675 74 Březník
Phone: +420 602 690 695
E-mail: info@psctherm.cz, www.psctherm.cz

PSC 250T BS FLOOR


Unique modern thermal insulation material.

- ✓ **RESISTS MECHANICAL DAMAGE**
- ✓ **AGAINST THERMAL FLUCTUATIONS**
- ✓ **NOT HARMFUL TO HEALTH**

Highly effective insulating and reflective. Decorative coating for use on floors public buildings, hospitals, homes for elderly, school facilities, etc.

It is fully washable, resistant to dirt, chemicals and is bacteriostatic.

It can withstand normal traffic loads. The coating is ideal for when insulating floors - effective protection against frost or heat penetration. Environmentally friendly, non-toxic, water-based paint resin and filled with microspheres. Suitable for use in climates where energy costs play an important role in maintaining a favourable thermal environment.

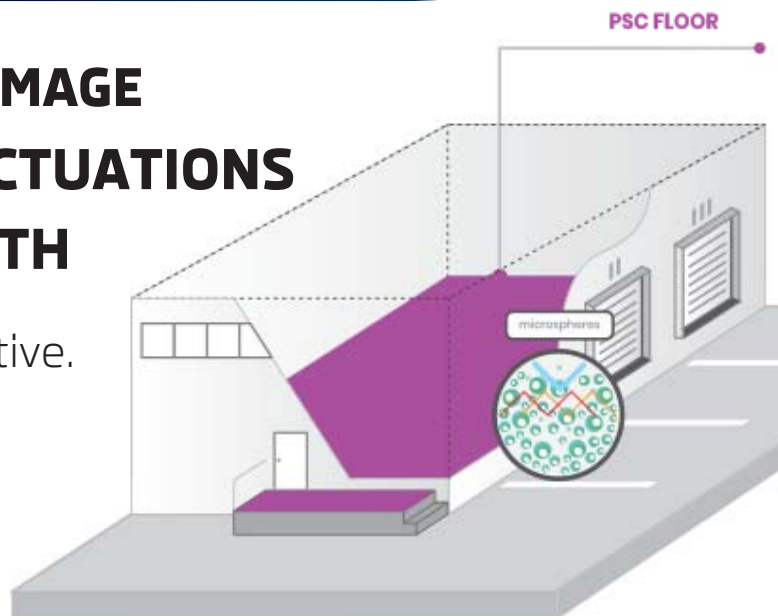

- **PSC 250T ECR BS FLOOR consumption:** 1 litre / 1 square metre
- **Application temperature:** from 5 degrees Celsius
- **Drying time:** up to 24 hours depending on temperature and nature of the environment.

Always use PSC 250T ECB BASIC B penetrating primer.

This product can also be ordered in a version **COLOR**. Different colours can be applied shades in the RAL range.



Březník 218, CZ -675 74 Březník

Phone: +420 602 690 695

E-mail: info@psctherm.cz, www.psctherm.cz