

PSC 250T HP

Unique modern thermal insulation material.

**HIGH
FINANCIAL
AND ENERGY
SAVINGS**

**AGAINST
MOULD!**



- ✓ Thermal insulation, anticorrosive, cancels thermal bridges. Prevents condensation.
- ✓ Suitable for all types of surfaces. Can be applied on hot surfaces.
- ✓ Insulates temperatures from -200°C do +600°C.
- ✓ Simple and quick application. The layer is from 1 mm!



Březník 218, CZ - 675 74 Březník
Phone: +420 602 690 695
E-mail: info@psctherm.cz, www.psctherm.cz

PSC 250T HP


Unique modern thermal insulation material.

- ✓ **PREVENTS TEMPERATURE DIFFERENCES**
- ✓ **ANTI-CORROSIVE, ENVIRONMENTALLY FRIENDLY**
- ✓ **CAN BE APPLIED AT +150°C**

Highly efficient, energy-efficient and flexible coating for insulation and sealing, with the highest content microspheres. It forms a uniform membrane that covers the micro-cracks.

HP is used on all steel structures, applied to the exterior or interior walls. It has excellent resistance to condensation, chemical environment (C4 a C5) and weathering.

The sheathing is stable and has high adhesion to metals. It is very effective in insulating hot and cold water pipes and air conditioning systems, roofs, building cladding, halls, boilers, freezers, steam pipes, liquid nitrogen tanks, containers, oil tanks and other chemical products, etc.

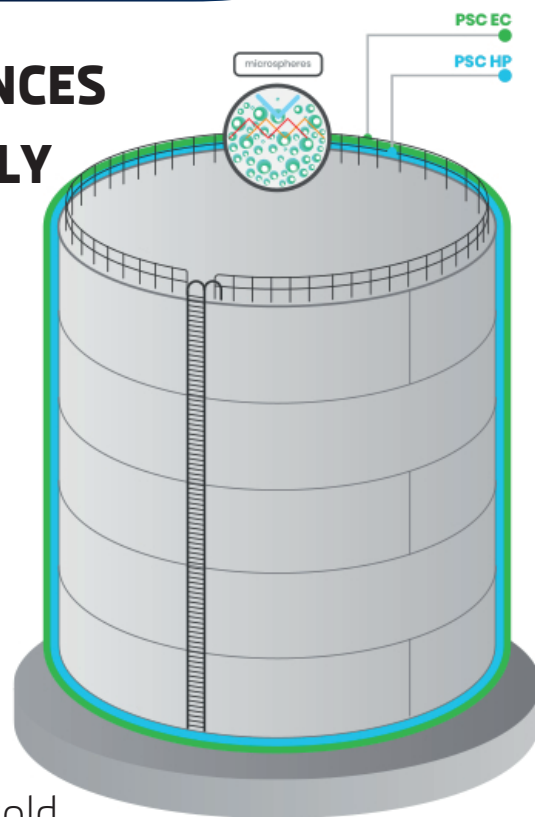

- **Consumption of PSC 250T HP:** depending on the nature of the surface and the environment
- **Application temperature:** from 8 degrees Celsius
- **Drying time:** up to 24 hours depending on the temperature and nature of the environment

Always use a penetrating primer
PSC 250T ECB BASIC A.



Březník 218, 675 74 Březník
Telefon: +420 602 690 695
E-mail: info@psctherm.cz, www.psctherm.cz